

Connecting to the RDPL / Telebyte Wireless Network With iPhone & iPod Touch

The RDPL / Telebyte Wireless Network is an open network, meaning that no authentication is required. It broadcasts **RDPL** as the SSID of the network and uses DHCP to assign users an IP address on the network. Please make sure that you have connected to the **RDPL** network before continuing any further.

In order to connect to the RDPL / Telebyte Wireless Network, you will need to configure the iPhone or iPod Touch to use the library's proxy server. To do so, take the following steps:



I. Select Settings from the Home screen.



2. Select Wi-Fi on the Settings screen





3. Make sure that RDPL is displayed under Choose a Network and that there is a checkmark beside it. Press the blue circle with the white arrow inside.

4. In the RDPL Network settings box scroll down and under HTTP Proxy press the Manual button.

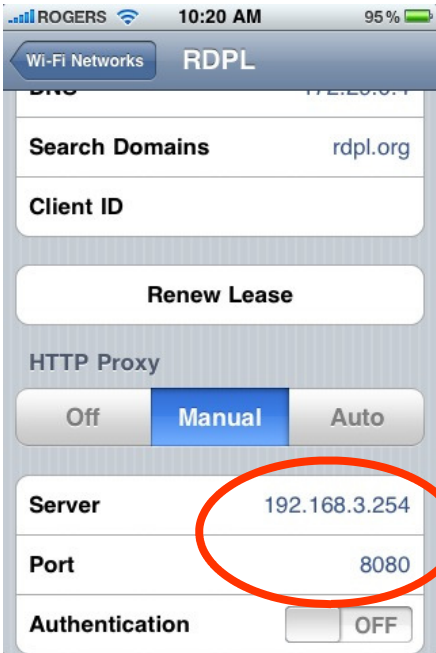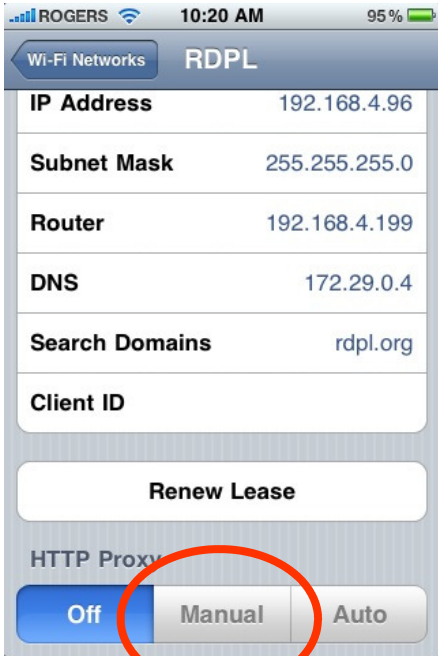

5. In the Server field type 192.168.3.254 and in the Port field type 8080. Press the Home button. You should now be able to access the web.